


M材質	Hardness	Heat Treatment
	硬度	熱處理
YK30	HRC56°~60°	真空處理 Vacuumed

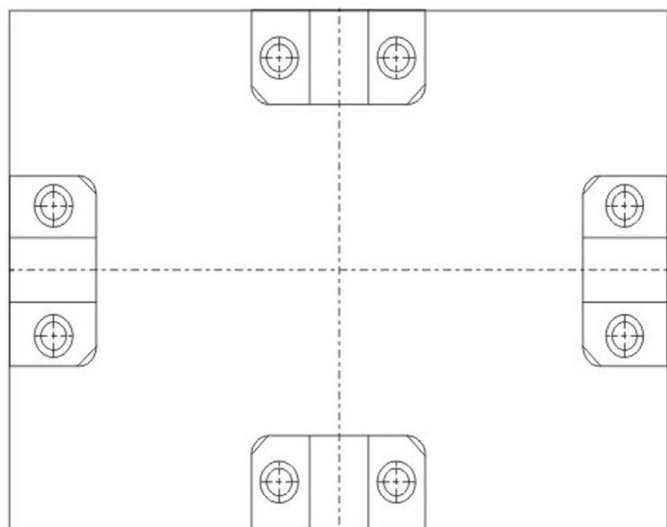

### 特性說明 / speciality

- 1.有效解決側裝式<sup>0</sup>°定位塊槽加工困難的問題. 尤其是對大型模胚更  
具方便性。
- 2.用于塑件品質,尺寸精度要求特高的塑膠模具
- 3.材質: YK30(HR058°-60°)

- 1.Can solve the 0° locking block sets' slot processing problem effectively
- 2.Apply to plastic mold which has very high demand about plastic product's quality and  
the tolerance of specification
- 3.Material: YK30(HRC58°-60°)

Type	Product code	A	B	C	D	E	F	G	H	K	T
JH043	LM50	50	20	25	25	12.5	34	C5	M6	30	17
	LM75	75	25	30	50	25	52	C8	M8	40	30

● Order:Type

備注：圓面以外特殊規格可定制

2D下載

3D下載

返回索引